



# Magellan RoadMate 1200 Battery Replacement

Written By: Ross Light



## INTRODUCTION

You can change the battery by opening up the GPS.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Back Cover



- Remove 4 rubber caps covering each screw by inserting the screwdriver into the side of cap and prying back and forth.

 Please note: this is a tedious process, but be patient.

## Step 2



- Remove the 4 screws holding the cover in place using a Philips #00 screwdriver.




## Step 3



- Open the back cover.



⚠ Lift the cover slowly and carefully; the speaker is screwed on the back cover and is connected to the circuit board.

## Step 4

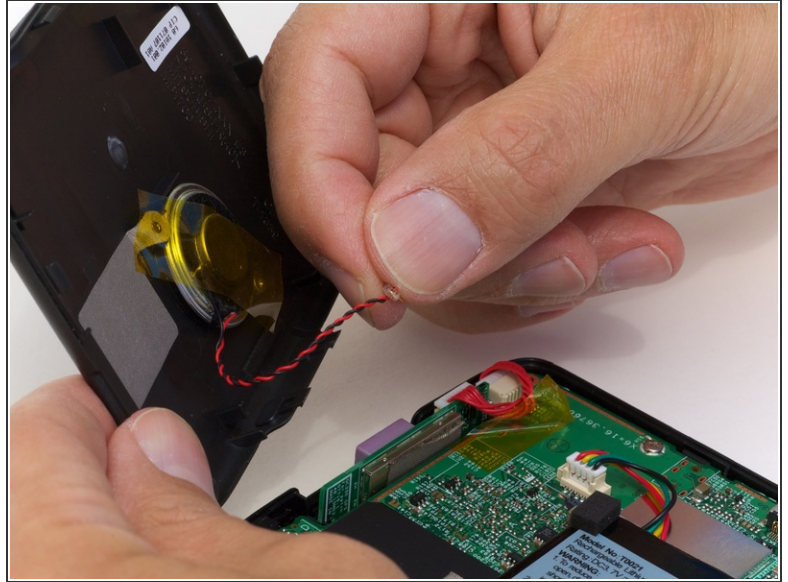

- Disconnect the speaker from the terminal.
- ☑ When reassembling, make sure that you plug the terminal in the same way. The black wire should be on the side farthest from the battery.

## Step 5 — Battery

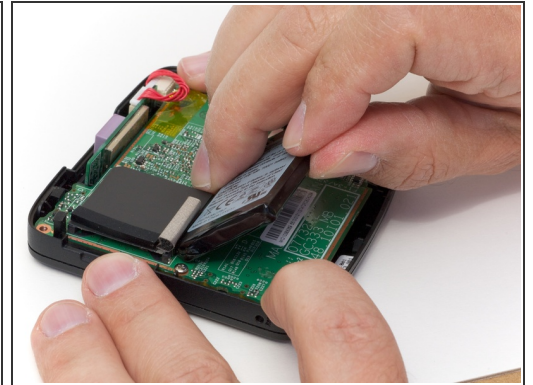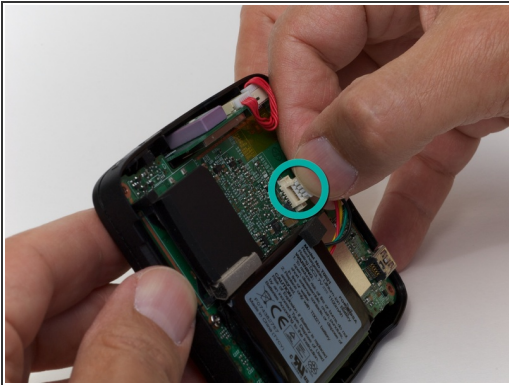

- Disconnect the battery connector from the circuit board.
- Pry the battery off the circuit board. The adhesive attaching it shouldn't require any other tools.

To reassemble your device, follow these instructions in reverse order.

